

REVISIONS

LTR	DESCRIPTION	DATE (YR-MO-DA)	APPROVED
F	Change to Military Drawing format. Remove vendor CAGE 13856.	87-02-13	W. Heckman
G	Remove CAGE code 63071. Changed to reflect MIL-H-38534 processing. Changed drawing CAGE to 67268.	90-05-09	W. Heckman
H	Update document to current MIL-H-38534 requirements. Editorial changes throughout.	92-05-20	G. A. Lude
J	Changes in accordance with NOR 5962-R126-94.	94-03-29	K. A. Cottongim
K	Add vendor CAGE 51651. Changes to table I and figure 1.	98-06-22	K. A. Cottongim

THE ORIGINAL FIRST PAGE OF THIS DRAWING HAS BEEN REPLACED.

CURRENT CAGE CODE 67268

REV																				
SHEET																				
REV																				
SHEET																				
REV STATUS OF SHEETS	REV	K	K	K	K	K	K	K	K	K	K									
	SHEET	1	2	3	4	5	6	7	8	9										

PMIC N/A	PREPARED BY Joan M. Fisher	DEFENSE SUPPLY CENTER COLUMBUS P. O. BOX 3990 COLUMBUS, OHIO 43216-5000			
STANDARD MICROCIRCUIT DRAWING THIS DRAWING IS AVAILABLE FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE AMSC N/A	CHECKED BY C. R. Jackson	MICROCIRCUIT, HYBRID, LINEAR, HIGH CURRENT AMPLIFIER, THICK/THIN FILM			
	APPROVED BY N. A. Hauck				
	DRAWING APPROVAL DATE 79-01-17	SIZE A	CAGE CODE 14933	78013	
	REVISION LEVEL K	SHEET 1 OF 9			

1. SCOPE

1.1 Scope. This drawing documents one product assurance class, class H (high reliability) and a choice of case outlines and lead finishes are available and are reflected in the Part or Identifying Number (PIN).

1.2 PIN. The PIN shall be as shown in the following example:



1.2.1 Device type(s). The device type(s) shall identify the circuit function as follows:

<u>Device type</u>	<u>Generic number</u>	<u>Circuit function</u>
01	0002, MSK 0002H	Current amplifier

1.2.2 Case outline(s). The case outline(s) shall be as designated in MIL-STD-1835 and as follows: 1/

<u>Outline letter</u>	<u>Descriptive designator</u>	<u>Terminals</u>	<u>Package style</u>
G	MACY1-X8	8	Can
X	See figure 1	8	Can

1.2.3 Lead finish. The lead finish shall be as specified in MIL-PRF-38534.

1.3 Absolute maximum ratings. 2/

Supply voltage range (V _S)	±22 V dc
Input voltage range	±22 V dc
Storage temperature range	-65° C to +150° C
Power dissipation (P _D), T _A = +25° C	600 mW <u>3/</u>
Lead temperature (soldering, 10 seconds)	+300° C
Thermal resistance, junction-to-case (θ _{JC})	40° C/W
Junction temperature (T _J)	+175° C

1.4 Recommended operating conditions.

Ambient operating temperature range (T _A)	-55° C to +125° C
---	-------------------

1/ Use 7801301XX to replace older devices marked 7801301GX (date codes prior to 30 August 1985) for applications requiring the case outline described on figure 1 herein.

2/ Stresses above the absolute maximum rating may cause permanent damage to the device. Extended operation at the maximum levels may degrade performance and affect reliability.

3/ No heat sink.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		78013
		REVISION LEVEL K	SHEET 2

2. APPLICABLE DOCUMENTS

2.1 Government specification, standards, and handbook. The following specification, standards, and handbook form a part of this drawing to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation.

SPECIFICATION

DEPARTMENT OF DEFENSE

MIL-PRF-38534 - Hybrid Microcircuits, General Specification for.

STANDARDS

DEPARTMENT OF DEFENSE

MIL-STD-883 - Test Methods and Procedures for Microelectronics.

MIL-STD-973 - Configuration Management.

MIL-STD-1835 - Microcircuit Case Outlines.

HANDBOOK

DEPARTMENT OF DEFENSE

MIL-HDBK-780 - Standard Microcircuit Drawings.

(Unless otherwise indicated, copies of the specification, standards, and handbook are available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.2 Order of precedence. In the event of a conflict between the text of this drawing and the references cited herein, the text of this drawing takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Item requirements. The individual item performance requirements for device class H shall be in accordance with MIL-PRF-38534. Compliance with MIL-PRF-38534 may include the performance of all tests herein or as designated in the device manufacturer's Quality Management (QM) plan or as designated for applicable device class. Therefore, the tests and inspections herein may not be performed for applicable device class (see MIL-PRF-38534). Furthermore, the manufacturers may take exceptions or use alternate methods to the tests and inspections herein and not perform them. However, the performance requirements as defined in MIL-PRF-38534 shall be met for the applicable device class. The modification in the QM plan shall not affect the form, fit, or function as described herein.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-PRF-38534 and herein.

3.2.1 Case outline(s). The case outline(s) shall be in accordance with 1.2.2 herein and figure 1.

3.2.2 Terminal connections. The terminal connections shall be as specified on figure 2.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		78013
		REVISION LEVEL K	SHEET 3

3.3 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in table I and shall apply over the full specified operating temperature range.

3.4 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table II. The electrical tests for each subgroup are defined in table I.

3.5 Marking of device(s). Marking of device(s) shall be in accordance with MIL-PRF-38534. The device shall be marked with the PIN listed in 1.2 herein. In addition, the manufacturer's vendor similar PIN may also be marked as listed in QML-38534.

3.6 Data. In addition to the general performance requirements of MIL-PRF-38534, the manufacturer of the device described herein shall maintain the electrical test data (variables format) from the initial quality conformance inspection group A lot sample, for each device type listed herein. Also, the data should include a summary of all parameters manually tested, and for those which, if any, are guaranteed. This data shall be maintained under document revision level control by the manufacturer and be made available to the preparing activity (DSCC-VA) upon request.

3.7 Certificate of compliance. A certificate of compliance shall be required from a manufacturer in order to supply to this drawing. The certificate of compliance (original copy) submitted to DSCC-VA shall affirm that the manufacturer's product meets the performance requirements of MIL-PRF-38534 and herein.

3.8 Certificate of conformance. A certificate of conformance as required in MIL-PRF-38534 shall be provided with each lot of microcircuits delivered to this drawing.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with MIL-PRF-38534 or as modified in the device manufacturer's Quality Management (QM) plan. The modification in the QM plan shall not affect the form, fit, or function as described herein.

4.2 Screening. Screening shall be in accordance with MIL-PRF-38534. The following additional criteria shall apply:

a. Preseal burn-in test, method 1030 of MIL-STD-883. (optional for class H)

(1) Test condition A, B, C, or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to either DSCC-VA or the acquiring activity upon request. Also, the test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1030 of MIL-STD-883.

(2) T_A as specified in accordance with table I of method 1015 of MIL-STD-883.

b. Burn-in test, method 1015 of MIL-STD-883.

(1) Test condition A, B, C, or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to either DSCC-VA or the acquiring activity upon request. Also, the test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1015 of MIL-STD-883.

(2) T_A as specified in accordance with table I of method 1015 of MIL-STD-883.

c. Interim and final electrical test parameters shall be as specified in table II herein, except interim electrical parameter tests prior to burn-in are optional at the discretion of the manufacturer.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		78013
		REVISION LEVEL K	SHEET 4

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions ^{1/} -55°C ≤ T _A ≤ +125°C unless otherwise specified	Group A subgroups	Device type	Limits		Unit
					Min	Max	
DC input offset current	I _{IO}	R _S = 10 kΩ, R _L = 1.0 kΩ	1, 2, 3	01	-10	+10	μA
DC input offset voltage	V _{IO}	R _S = 300 Ω, R _L = 1.0 kΩ	1, 2, 3	01	-30	+30	mV
Output voltage swing	V _O	V _{IN} = ±12 V, R _L = 1.0 kΩ, T _A = +25°C	4	01	±10		V
		V _{IN} = ±10 V, R _L = 100 Ω, V _S = ±15 V, T _A = +25°C			±9.5		
Supply currents	+I _{CC}	R _S = 10 kΩ, R _L = 1.0 kΩ, V _{IN} = 0 V, T _A = +25°C	1	01		+10.0	mA
	-I _{CC}				-10.0		
Voltage gain	A _V	V _{IN} = 3.0 V _{p-p} , R _S = 10 kΩ, R _L = 1.0 kΩ, f = 1.0 kHz	4, 5, 6 ^{2/}	01	0.95		
Input impedance ^{3/}	Z _{IN}	V _{IN} = 1.0 V rms, R _S = 200 kΩ, R _L = 1.0 kΩ, f = 1.0 kHz, T _A = +25°C	4	01	180		kΩ
Output impedance ^{3/}	Z _{OUT}	V _{IN} = 1.0 V rms, R _S = 10 kΩ, R _L = 50 Ω, f = 1.0 kHz, T _A = +25°C	4	01		10	Ω
Rise time	t _r	V _{OUT} = 2.5 V _{p-p} , R _S = 100 Ω, R _L = 50 Ω, T _A = +25°C	4	01		12	ns

^{1/} V_S = ±12 V, unless otherwise specified.

^{2/} Subgroups 5 and 6 shall be tested as part of device initial characterization and after design and process changes. Parameter shall be guaranteed to the limits specified for subgroups 5 and 6 for all lots not specifically tested.

^{3/} Parameter and limits specified shall be guaranteed, but need not be tested.

STANDARD
MICROCIRCUIT DRAWING
DEFENSE SUPPLY CENTER COLUMBUS
COLUMBUS, OHIO 43216-5000

SIZE
A

78013

REVISION LEVEL
K

SHEET
5

Case outline X.

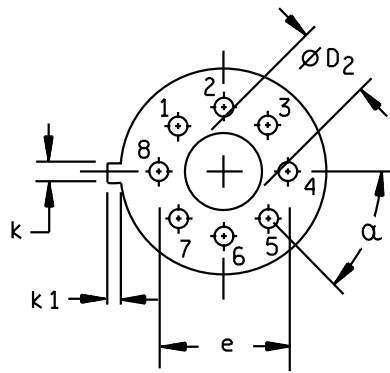
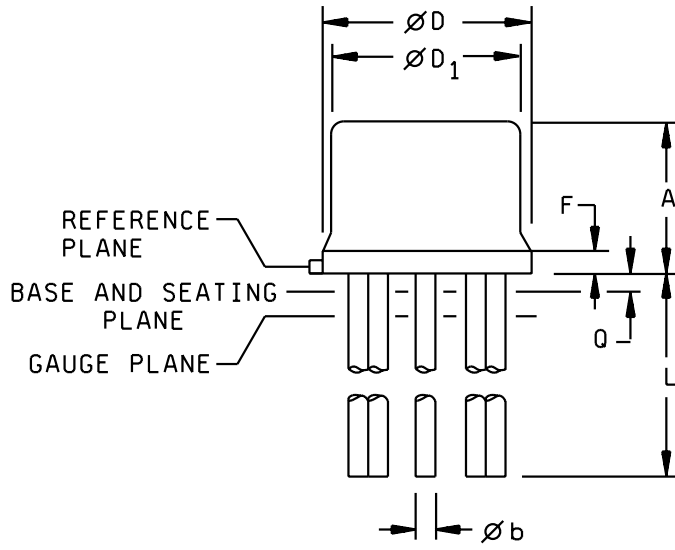


FIGURE 1. Case outline(s).

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		78013
		REVISION LEVEL K	SHEET 6

Case outline X - Continued.

Symbol	Inches		Millimeters		Notes
	Min	Max	Min	Max	
A	0.155	0.185	3.94	4.70	4
ϕb	0.015	0.019	0.38	0.48	
ϕD	0.335	0.370	8.51	9.40	
ϕD_1	0.305	0.335	7.75	8.51	
ϕD_2	0.110	0.160	2.79	4.06	5
e	0.230 BSC		5.84 BSC		
F	---	0.040	---	1.02	6
k	0.026	0.034	0.69	0.86	
k_1	0.027	0.045	0.69	1.14	
L	0.500	0.750	12.70	19.05	
Q	---	0.050	---	1.27	5
α	45° BSC		45° BSC		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The product may be measured by direct methods or by gauge.
4. All leads: Increase maximum limit by .003 inch (0.08 mm) when lead finish A is applied.
5. Optional base and seating plane.
6. Measured from the maximum diameter of the product.

FIGURE 1. Case outline(s) - Continued.

Device type	01
Case outlines	G and X
Terminal number	Terminal symbol
1	V ₁ +
2	V ₂ +
3	E ₃
4	Output
5	E ₄
6	V ₂ -
7	V ₁ -
8	Input

FIGURE 2. Terminal connections.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		78013
		REVISION LEVEL K	SHEET 7

TABLE II. Electrical test requirements.

MIL-PRF-38534 test requirements	Subgroups (in accordance with MIL-PRF-38534, group A test table)
Interim electrical parameters	
Final electrical parameters	1*, 2, 3, 4, 5, 6
Group A test requirements	1, 2, 3, 4
Group C end-point electrical parameters	1, 2, 3, 4

* PDA applies to subgroup 1.

4.3 Conformance and periodic inspections. Conformance inspection (CI) and periodic inspection (PI) shall be in accordance with MIL-PRF-38534 and as specified herein.

4.3.1 Group A inspection (CI). Group A inspection shall be in accordance with MIL-PRF-38534 and as follows:

- a. Tests shall be as specified in table II herein.
- b. Subgroups 7, 8, 9, 10, and 11 shall be omitted.

4.3.2 Group B inspection (PI). Group B inspection shall be in accordance with MIL-PRF-38534.

4.3.3 Group C inspection (PI). Group C inspection shall be in accordance with MIL-PRF-38534 and as follows:

- a. End-point electrical parameters shall be as specified in table II herein.
- b. Steady-state life test, method 1005 of MIL-STD-883.
 - (1) Test condition A, B, C, or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to either DSCC-VA or the acquiring activity upon request. Also, the test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1005 of MIL-STD-883.
 - (2) T_A as specified in accordance with table I of method 1005 of MIL-STD-883.
 - (3) Test duration: 1,000 hours, except as permitted by method 1005 of MIL-STD-883.

4.3.4 Group D inspection (PI). Group D inspection shall be in accordance with MIL-PRF-38534.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-PRF-38534.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		78013
		REVISION LEVEL K	SHEET 8

6. NOTES

6.1 Intended use. Microcircuits conforming to this drawing are intended for use for Government microcircuit applications (original equipment), design applications, and logistics purposes.

6.2 Replaceability. Microcircuits covered by this drawing will replace the same generic device covered by a contractor-prepared specification or drawing.

6.3 Configuration control of SMD's. All proposed changes to existing SMD's will be coordinated with the users of record for the individual documents. This coordination will be accomplished in accordance with MIL-STD-973 using DD Form 1692, Engineering Change Proposal.

6.4 Record of users. Military and industrial users shall inform Defense Supply Center Columbus when a system application requires configuration control and the applicable SMD. DSCC will maintain a record of users and this list will be used for coordination and distribution of changes to the drawings. Users of drawings covering microelectronic devices (FSC 5962) should contact DSCC-VA, telephone (614) 692-7603.

6.5 Comments. Comments on this drawing should be directed to DSCC-VA, P. O. Box 3990, Columbus, Ohio 43216-5000, or telephone (614) 692-0676.

6.6 Sources of supply. Sources of supply are listed in QML-38534. The vendors listed in QML-38534 have submitted a certificate of compliance (see 3.7 herein) to DSCC-VA and have agreed to this drawing.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 43216-5000	SIZE A		78013
		REVISION LEVEL K	SHEET 9

STANDARD MICROCIRCUIT DRAWING SOURCE APPROVAL BULLETIN

DATE: 98-06-22

Approved sources of supply for SMD 78013 are listed below for immediate acquisition only and shall be added to QML-38534 during the next revision. QML-38534 will be revised to include the addition or deletion of sources. The vendors listed below have agreed to this drawing and a certificate of compliance has been submitted to and accepted by DSCC-VA. This bulletin is superseded by the next dated revision of QML-38534.

Standard microcircuit drawing PIN <u>1/</u>	Vendor CAGE number	Vendor similar PIN <u>2/</u>
7801301XA 7801301XC	51651 51651	MSK 0002H MSK 0002H

- 1/ The lead finish shown for each PIN, representing a hermetic package, is the most readily available from the manufacturer listed for that part. If the desired lead finish is not listed contact the Vendor to determine availability.
- 2/ Caution. Do not use this number for item acquisition. Items acquired to this number may not satisfy the performance requirements of this drawing.

Vendor CAGE
number

51651

Vendor name
and address

M. S. Kennedy Corporation
8170 Thompson Road
Cicero, NY 13039-9393

The information contained herein is disseminated for convenience only and the Government assumes no liability whatsoever for any inaccuracies in this information bulletin.

TECHNICAL DATA

DISCLAIMER:

- 1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the Sensitron Semiconductor sales department for the latest version of the datasheet(s).
- 2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.
- 3- In no event shall Sensitron Semiconductor be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). Sensitron Semiconductor assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.
- 4- In no event shall Sensitron Semiconductor be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.
- 5- No license is granted by the datasheet(s) under any patents or other rights of any third party or Sensitron Semiconductor.
- 6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of Sensitron Semiconductor.
- 7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations.