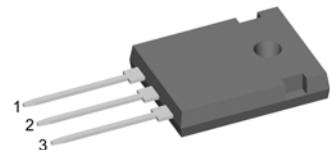
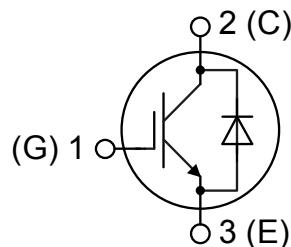


**XPT IGBT**

$V_{CES}$  = 1200V  
 $I_{C25}$  = 38A  
 $V_{CE(sat)}$  = 1.8V

**Copack****Part number****IXA20IF1200HB**

Backside: collector

**Features / Advantages:**

- Easy paralleling due to the positive temperature coefficient of the on-state voltage
- Rugged XPT design (Xtreme light Punch Through) results in:
  - short circuit rated for 10  $\mu$ sec.
  - very low gate charge
  - low EMI
  - square RBSOA @ 3x  $I_c$
- Thin wafer technology combined with the XPT design results in a competitive low  $V_{CE(sat)}$
- SONIC™ diode
  - fast and soft reverse recovery
  - low operating forward voltage

**Applications:**

- AC motor drives
- Solar inverter
- Medical equipment
- Uninterruptible power supply
- Air-conditioning systems
- Welding equipment
- Switched-mode and resonant-mode power supplies
- Inductive heating, cookers
- Pumps, Fans


**Package: TO-247**

- Industry standard outline
- RoHS compliant
- Epoxy meets UL 94V-0

IGBT			Ratings				
Symbol	Definition	Conditions	min.	typ.	max.	Unit	
$V_{CES}$	collector emitter voltage	$T_{VJ} = 25^\circ C$			1200	V	
$V_{GES}$	max. DC gate voltage				$\pm 20$	V	
$V_{GEM}$	max. transient gate emitter voltage				$\pm 30$	V	
$I_{C25}$	collector current	$T_c = 25^\circ C$			38	A	
$I_{C80}$		$T_c = 80^\circ C$			22	A	
$P_{tot}$	total power dissipation	$T_c = 25^\circ C$			165	W	
$V_{CE(sat)}$	collector emitter saturation voltage	$I_c = 15 A; V_{GE} = 15 V$	$T_{VJ} = 25^\circ C$	1.8	2.1	V	
			$T_{VJ} = 125^\circ C$	2.1		V	
$V_{GE(th)}$	gate emitter threshold voltage	$I_c = 0.6 mA; V_{GE} = V_{CE}$	$T_{VJ} = 25^\circ C$	5.4	5.9	6.5	V
$I_{CES}$	collector emitter leakage current	$V_{CE} = V_{CES}; V_{GE} = 0 V$	$T_{VJ} = 25^\circ C$		0.1	mA	
			$T_{VJ} = 125^\circ C$	0.1		mA	
$I_{GES}$	gate emitter leakage current	$V_{GE} = \pm 20 V$			500	nA	
$Q_{G(on)}$	total gate charge	$V_{CE} = 600 V; V_{GE} = 15 V; I_c = 15 A$		47		nC	
$t_{d(on)}$	turn-on delay time	inductive load $V_{CE} = 600 V; I_c = 15 A$ $V_{GE} = \pm 15 V; R_G = 56 \Omega$		70		ns	
$t_r$	current rise time			40		ns	
$t_{d(off)}$	turn-off delay time			250		ns	
$t_f$	current fall time			100		ns	
$E_{on}$	turn-on energy per pulse			1.55		mJ	
$E_{off}$	turn-off energy per pulse			1.7		mJ	
<b>RBSOA</b>	reverse bias safe operating area	$V_{GE} = \pm 15 V; R_G = 56 \Omega$	$T_{VJ} = 125^\circ C$				
$I_{CM}$		$V_{CEmax} = 1200 V$			45	A	
<b>SCSOA</b>	short circuit safe operating area	$V_{CEmax} = 900 V$					
$t_{sc}$	short circuit duration	$V_{CE} = 900 V; V_{GE} = \pm 15 V$	$T_{VJ} = 125^\circ C$		10	μs	
$I_{sc}$	short circuit current	$R_G = 56 \Omega$ ; non-repetitive		60		A	
$R_{thJC}$	thermal resistance junction to case				0.76	K/W	
$R_{thCH}$	thermal resistance case to heatsink				0.25	K/W	
Diode							
$V_{RRM}$	max. repetitive reverse voltage	$T_{VJ} = 25^\circ C$			1200	V	
$I_{F25}$	forward current	$T_c = 25^\circ C$			45	A	
$I_{F80}$		$T_c = 80^\circ C$			24	A	
$V_F$	forward voltage	$I_F = 20 A$	$T_{VJ} = 25^\circ C$		2.20	V	
			$T_{VJ} = 125^\circ C$		1.95	V	
$I_R$	reverse current	$V_R = V_{RRM}$	$T_{VJ} = 25^\circ C$		*	mA	
	* not applicable, see $I_{CES}$ value above		$T_{VJ} = 125^\circ C$		*	mA	
$Q_{rr}$	reverse recovery charge	$V_R = 600 V$ $-di_F/dt = -400 A/\mu s$ $I_F = 20 A; V_{GE} = 0 V$		3		μC	
$I_{RM}$	max. reverse recovery current			20		A	
$t_{rr}$	reverse recovery time			350		ns	
$E_{rec}$	reverse recovery energy			0.7		mJ	
$R_{thJC}$	thermal resistance junction to case				0.9	K/W	
$R_{thCH}$	thermal resistance case to heatsink				0.25	K/W	

Package TO-247			Ratings			
Symbol	Definition	Conditions	min.	typ.	max.	Unit
$I_{RMS}$	$RMS$ current	per terminal			70	A
$T_{VJ}$	virtual junction temperature		-40		150	°C
$T_{op}$	operation temperature		-40		125	°C
$T_{stg}$	storage temperature		-40		150	°C
<b>Weight</b>				6		g
$M_d$	mounting torque		0.8		1.2	Nm
$F_c$	mounting force with clip		20		120	N

## Product Marking

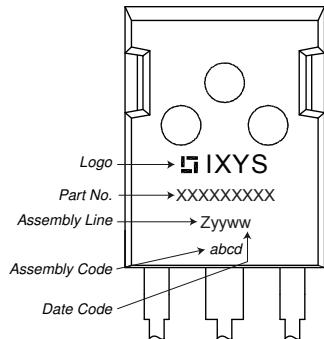

## Part number


I = IGBT  
 X = XPT IGBT  
 A = Gen 1 / std  
 20 = Current Rating [A]  
 IF = Copack  
 1200 = Reverse Voltage [V]  
 HB = TO-247AD (3)

Ordering	Part Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	IXA20IF1200HB	IXA20IF1200HB	Tube	30	508460

Similar Part	Package	Voltage class
IXA20I1200PB	TO-220AB (3)	1200

## Equivalent Circuits for Simulation

\* on die level

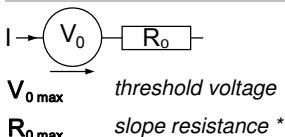
 $T_{VJ} = 150$  °C

IGBT


Diode

1.1	1.25	V
86	42.5	mΩ

## Outlines TO-247

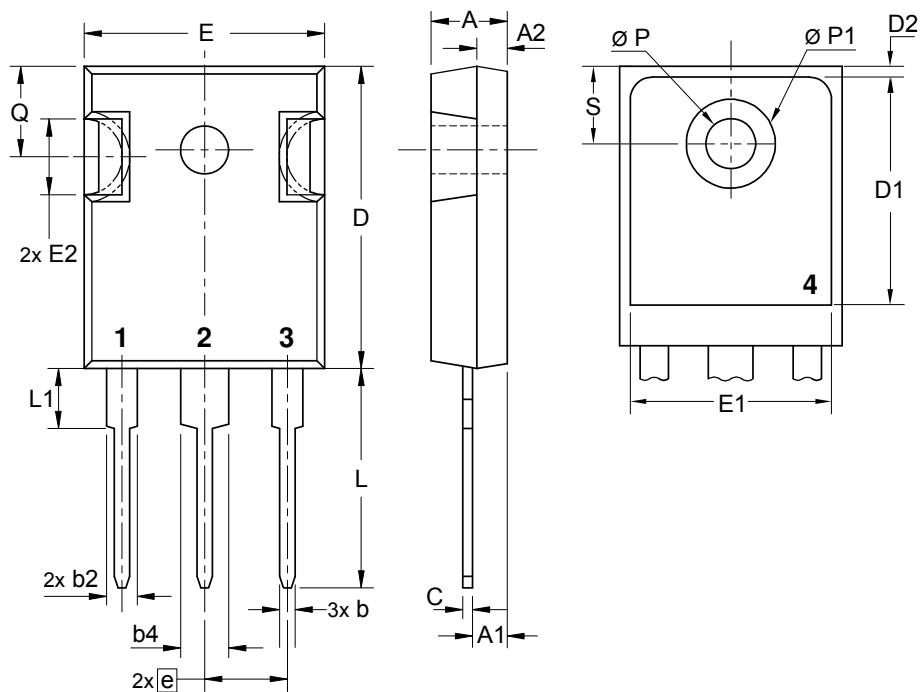

Sym.	Inches min. max.	Millimeter min. max.
A	0.185 0.209	4.70 5.30
A1	0.087 0.102	2.21 2.59
A2	0.059 0.098	1.50 2.49
D	0.819 0.845	20.79 21.45
E	0.610 0.640	15.48 16.24
E2	0.170 0.216	4.31 5.48
e	0.215 BSC	5.46 BSC
L	0.780 0.800	19.80 20.30
L1	- 0.177	- 4.49
Ø P	0.140 0.144	3.55 3.65
Q	0.212 0.244	5.38 6.19
S	0.242 BSC	6.14 BSC
b	0.039 0.055	0.99 1.40
b2	0.065 0.094	1.65 2.39
b4	0.102 0.135	2.59 3.43
c	0.015 0.035	0.38 0.89
D1	0.515 -	13.07 -
D2	0.020 0.053	0.51 1.35
E1	0.530 -	13.45 -
Ø P1	- 0.29	- 7.39

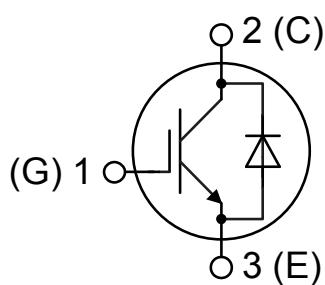

## IGBT

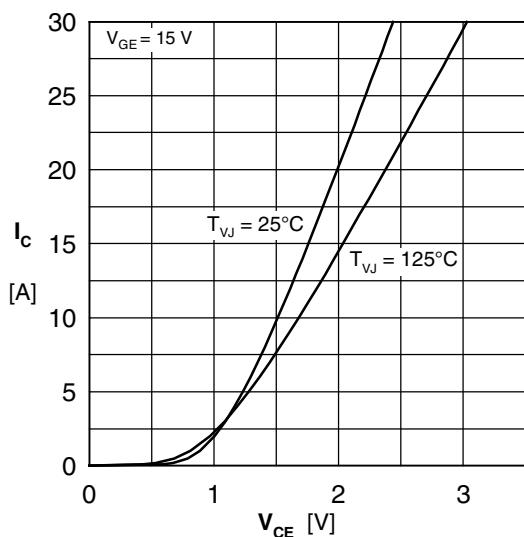


Fig. 1 Typ. output characteristics

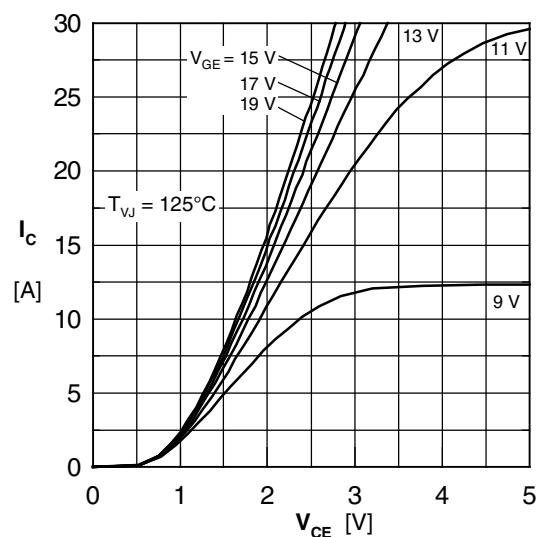


Fig. 2 Typ. output characteristics

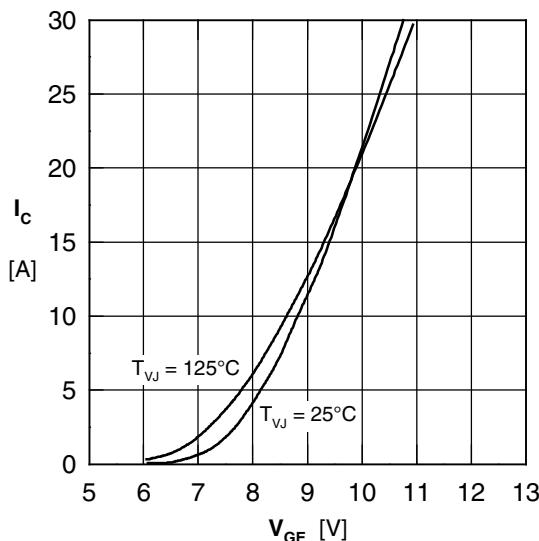


Fig. 3 Typ. tranfer characteristics

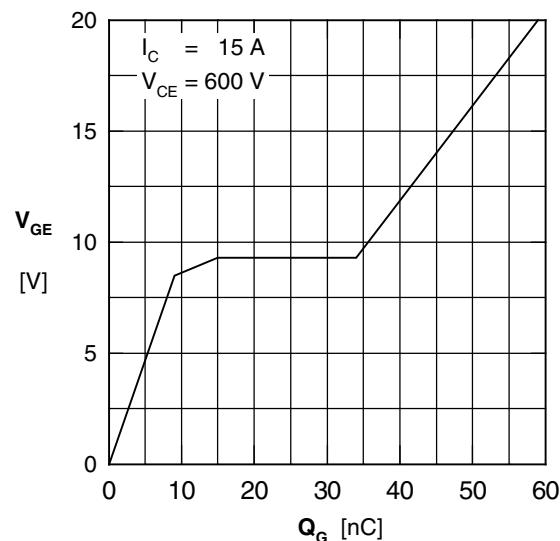


Fig. 4 Typ. turn-on gate charge

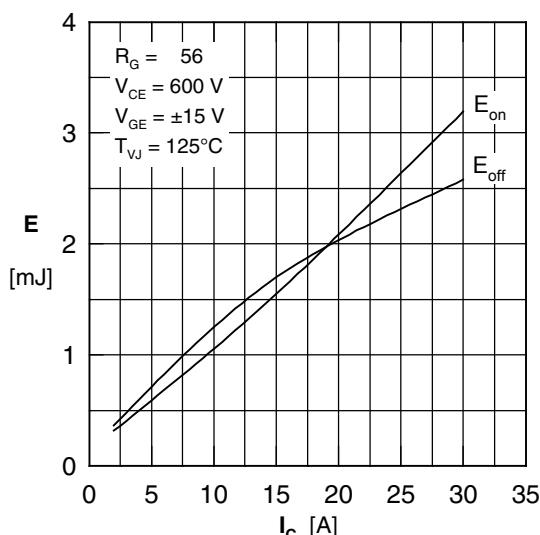


Fig. 5 Typ. switching energy vs. collector current







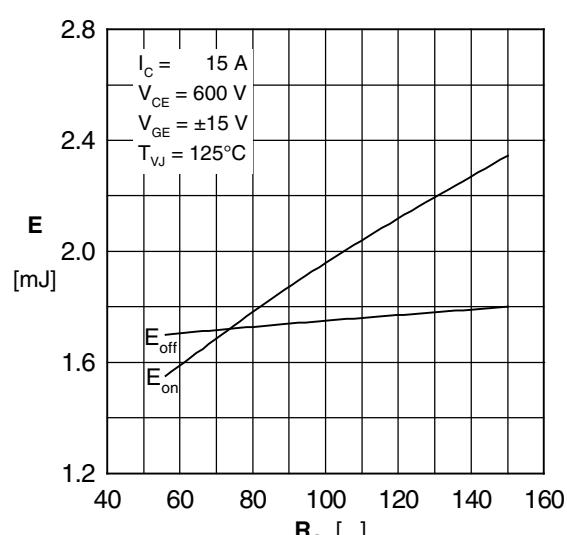


Fig. 6 Typ. switching energy vs. gate resistance

## Diode

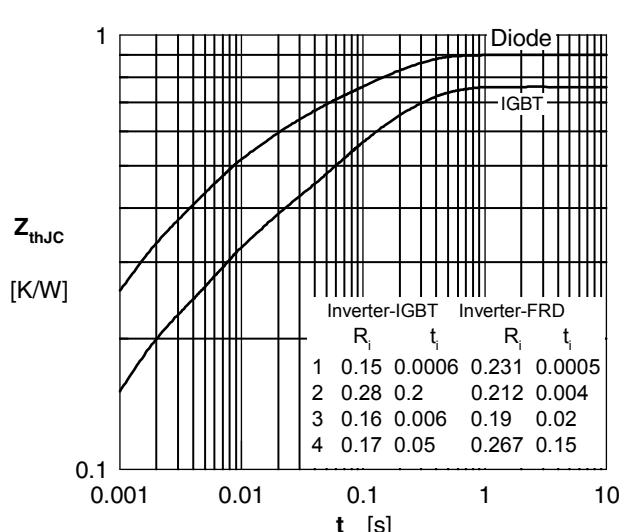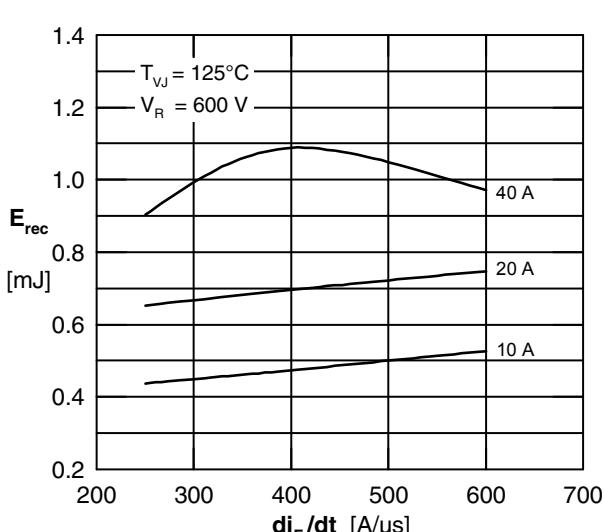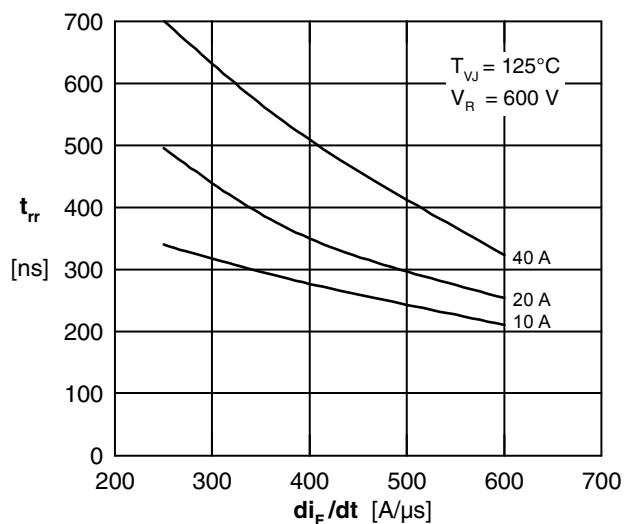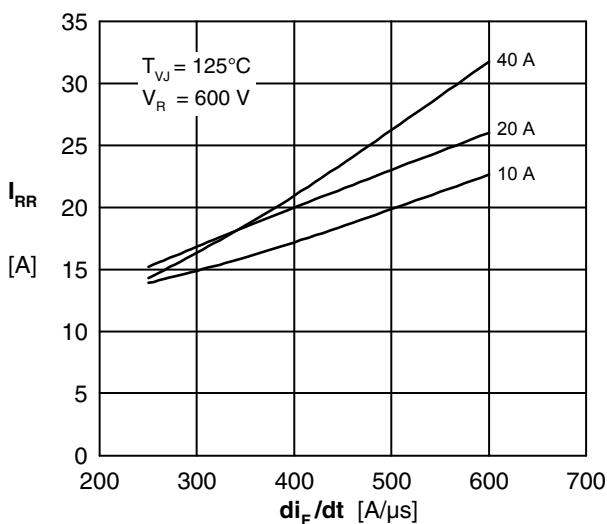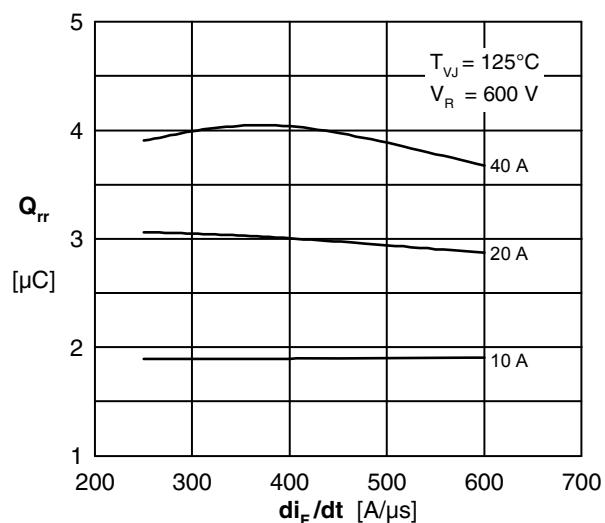

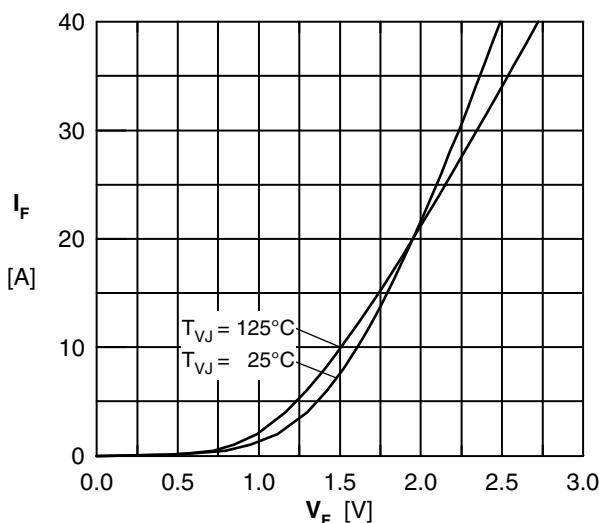

---

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).