


High speed IGBT

IXSH 35N100A IXSM 35N100A


V_{CES} = 1000 V
 I_{C25} = 70 A
 $V_{CE(sat)}$ = 3.5 V

Short Circuit SOA Capability




Symbol	Test Conditions	Maximum Ratings		
V_{CES}	$T_J = 25^\circ\text{C}$ to 150°C	1000	V	
V_{CGR}	$T_J = 25^\circ\text{C}$ to 150°C ; $R_{GE} = 1 \text{ M}\Omega$	1000	V	
V_{GES}	Continuous	± 20	V	
V_{GEM}	Transient	± 30	V	
I_{C25}	$T_c = 25^\circ\text{C}$	70	A	
I_{C90}	$T_c = 90^\circ\text{C}$	35	A	
I_{CM}	$T_c = 25^\circ\text{C}$, 1 ms	140	A	
SSOA (RBSOA)	$V_{GE} = 15 \text{ V}$, $T_J = 125^\circ\text{C}$, $R_G = 2.7 \Omega$ Clamped inductive load, $L = 30 \mu\text{H}$	$I_{CM} = 70$ @ $0.8 V_{CES}$	A	
t_{sc} (SCSOA)	$V_{GE} = 15 \text{ V}$, $V_{OE} = 0.6 \cdot V_{CES}$, $T_J = 125^\circ\text{C}$ $R_G = 22 \Omega$, non repetitive	10	μs	
P_c	$T_c = 25^\circ\text{C}$	300	W	
T_J		-55 ... +150	$^\circ\text{C}$	
T_{JM}		150	$^\circ\text{C}$	
T_{stg}		-55 ... +150	$^\circ\text{C}$	
M_d	Mounting torque	1.13/10	Nm/lb.in.	
Weight		TO-204 = 18 g, TO-247 = 6 g		
Maximum lead temperature for soldering 1.6 mm (0.062 in.) from case for 10 s		300	$^\circ\text{C}$	

TO-247 AD (IXSH)

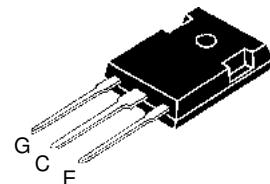

TO-204 AE (IXSM)



G = Gate, C = Collector,
E = Emitter, TAB = Collector

Symbol	Test Conditions	Characteristic Values			
		($T_J = 25^\circ\text{C}$, unless otherwise specified)	min.	typ.	max.
BV_{CES}	$I_c = 3 \text{ mA}$, $V_{GE} = 0 \text{ V}$	1000			V
$V_{GE(th)}$	$I_c = 4 \text{ mA}$, $V_{CE} = V_{GE}$		5		V
I_{CES}	$V_{CE} = 0.8 \cdot V_{CES}$ $V_{GE} = 0 \text{ V}$	$T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$		250	μA
I_{GES}	$V_{CE} = 0 \text{ V}$, $V_{GE} = \pm 20 \text{ V}$			1	mA
$V_{CE(sat)}$	$I_c = I_{C90}$, $V_{GE} = 15 \text{ V}$			±100	nA
				3.5	V

Features

- International standard packages
- Guaranteed Short Circuit SOA capability
- Low $V_{CE(sat)}$
 - for low on-state conduction losses
- High current handling capability
- MOS Gate turn-on
 - drive simplicity
- Fast Fall Time for switching speeds up to 20 kHz

Applications


- AC motor speed control
- Uninterruptible power supplies (UPS)
- Welding

Advantages

- Easy to mount with 1 screw (TO-247) (isolated mounting screw hole)
- High power density


Symbol	Test Conditions	Characteristic Values		
		($T_J = 25^\circ\text{C}$, unless otherwise specified)	min.	typ.
g_{fs}	$I_C = I_{C90}$; $V_{CE} = 10 \text{ V}$, Pulse test, $t \leq 300 \mu\text{s}$, duty cycle $d \leq 2\%$	20	25	S
$I_{C(on)}$	$V_{GE} = 15 \text{ V}$, $V_{CE} = 10 \text{ V}$	240		A
C_{ies}	$V_{CE} = 25 \text{ V}$, $V_{GE} = 0 \text{ V}$, $f = 1 \text{ MHz}$	4400		pF
C_{oes}		325		pF
C_{res}		85		pF
Q_g	$I_C = I_{C90}$, $V_{GE} = 15 \text{ V}$, $V_{CE} = 0.5 V_{CES}$	180	260	nC
Q_{ge}		45	60	nC
Q_{gc}		120	200	nC
$t_{d(on)}$	Inductive load, $T_J = 25^\circ\text{C}$ $I_C = I_{C90}$, $V_{GE} = 15 \text{ V}$, $L = 100 \mu\text{H}$ $V_{CE} = 0.8 V_{CES}$, $R_G = 2.7 \Omega$ Switching times may increase for V_{CE} (Clamp) > $0.8 \cdot V_{CES}$, higher T_J or increased R_G	80		ns
t_{ri}		150		ns
$t_{d(off)}$		400		ns
t_{fi}		700	950	ns
E_{off}		10		mJ
$t_{d(on)}$	Inductive load, $T_J = 125^\circ\text{C}$ $I_C = I_{C90}$, $V_{GE} = 15 \text{ V}$, $L = 100 \mu\text{H}$ $V_{CE} = 0.8 V_{CES}$, $R_G = 2.7 \Omega$ Remarks: Switching times may increase for V_{CE} (Clamp) > $0.8 \cdot V_{CES}$, higher T_J or increased R_G	100		ns
t_{ri}		200		ns
E_{on}		4.2		mJ
$t_{d(off)}$		400	550	ns
t_{fi}		1300	2000	ns
E_{off}		15	31	mJ
R_{thJC}			0.42	K/W
R_{thCK}		0.25		K/W

TO-247 AD (IXSH) Outline

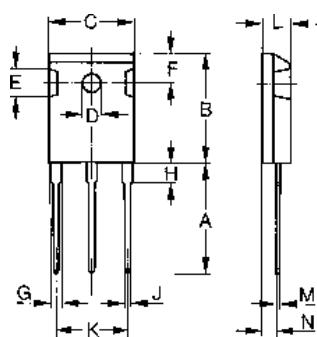

Dim.	Millimeter Min. Max.	Inches Min. Max.
A	19.81 20.32	0.780 0.800
B	20.80 21.46	0.819 0.845
C	15.75 16.26	0.610 0.640
D	3.55 3.65	0.140 0.144
E	4.32 5.49	0.170 0.216
F	5.4 6.2	0.212 0.244
G	1.65 2.13	0.065 0.084
H	- 4.5	- 0.177
J	1.0 1.4	0.040 0.055
K	10.8 11.0	0.426 0.433
L	4.7 5.3	0.185 0.209
M	0.4 0.8	0.016 0.031
N	1.5 2.49	0.087 0.102

TO-204 AE (IXSM) Outline

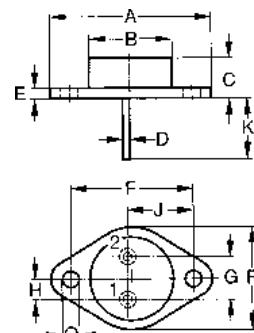

Dim.	Millimeter Min. Max.	Inches Min. Max.
A	38.61 39.12	1.520 1.540
B	- 22.22	- 0.875
C	6.40 11.40	0.252 0.449
D	1.45 1.60	0.057 0.063
E	1.52 3.43	0.060 0.135
F	30.15 BSC	1.187 BSC
G	10.67 11.17	0.420 0.440
H	5.21 5.71	0.205 0.225
J	16.64 17.14	0.655 0.675
K	11.18 12.19	0.440 0.480
Q	3.84 4.19	0.151 0.165
R	25.16 26.66	0.991 1.050

Fig.1 Saturation Characteristics

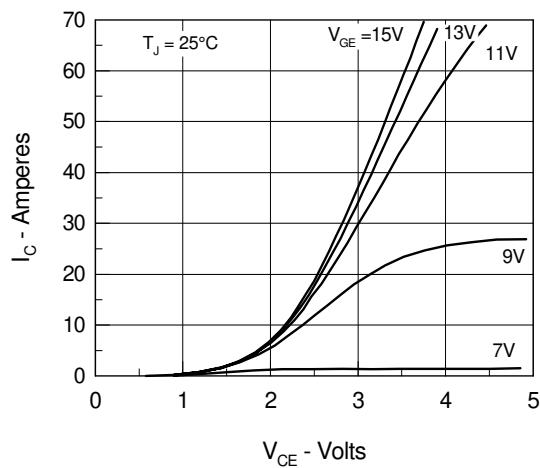


Fig.3 Collector-Emitter Voltage vs. Gate-Emitter Voltage

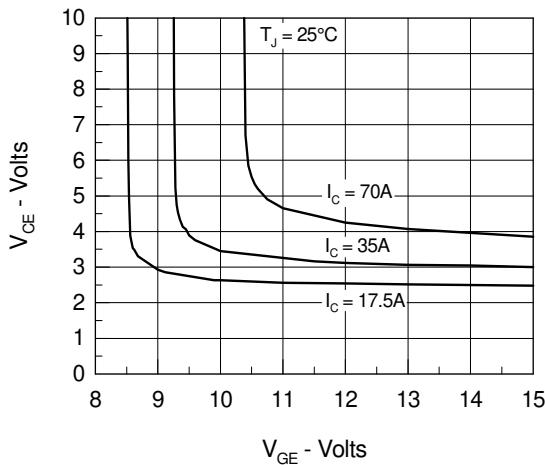


Fig.5 Input Admittance

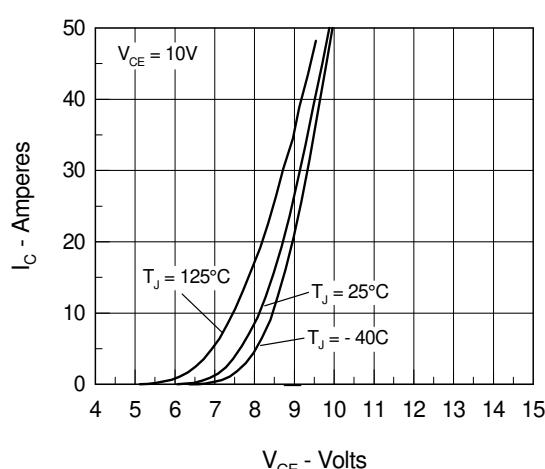


Fig.2 Output Characteristics

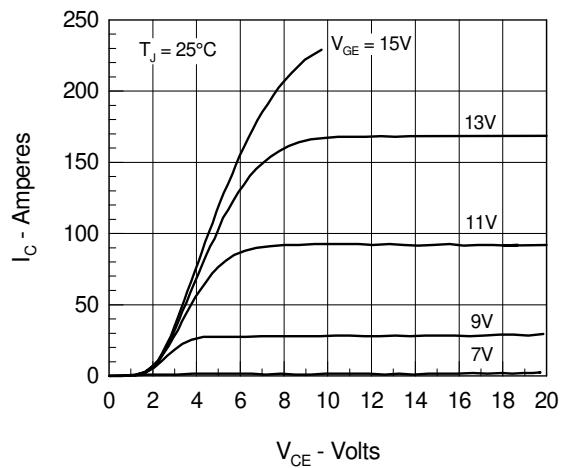


Fig.4 Temperature Dependence of Output Saturation Voltage

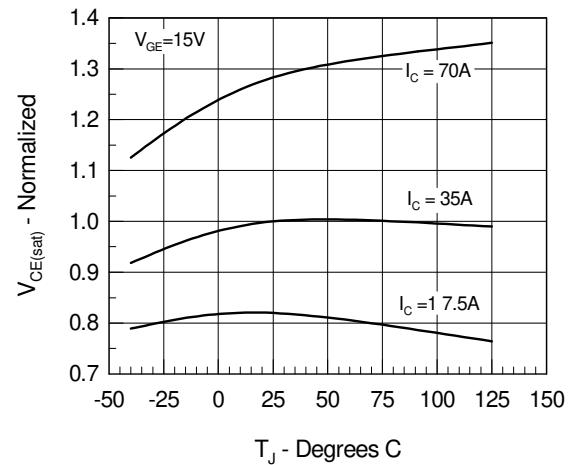


Fig.6 Temperature Dependence of Breakdown and Threshold Voltage

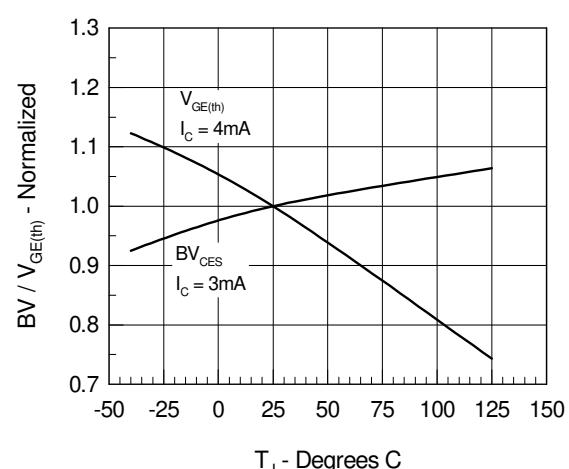


Fig.7 Turn-Off Energy per Pulse and Fall Time on Collector Current

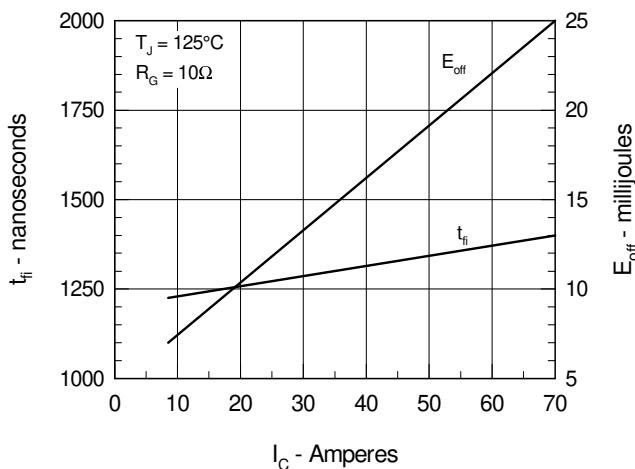


Fig.8 Dependence of Turn-Off Energy Per Pulse and Fall Time on R_G

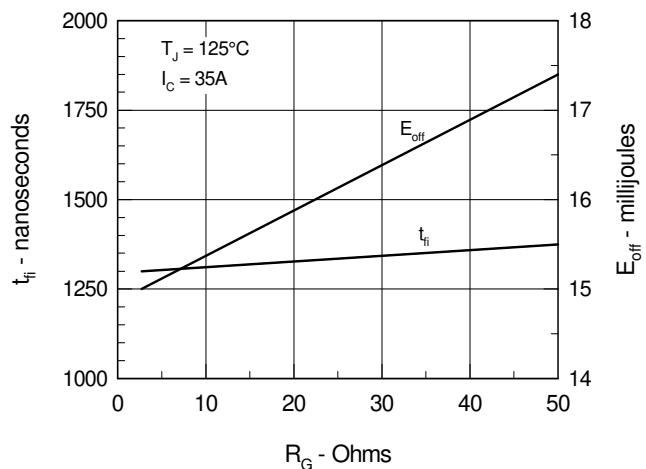


Fig.9 Gate Charge Characteristic Curve

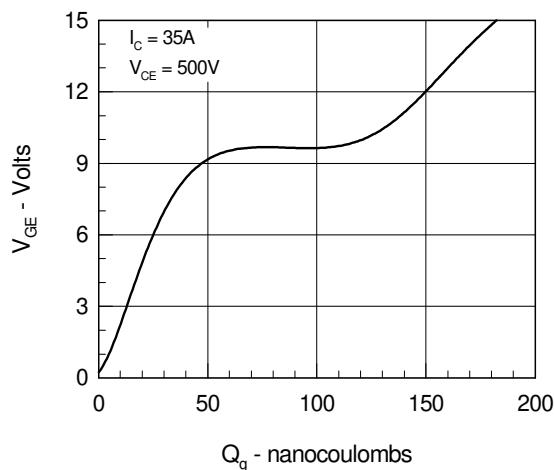


Fig.10 Turn-Off Safe Operating Area

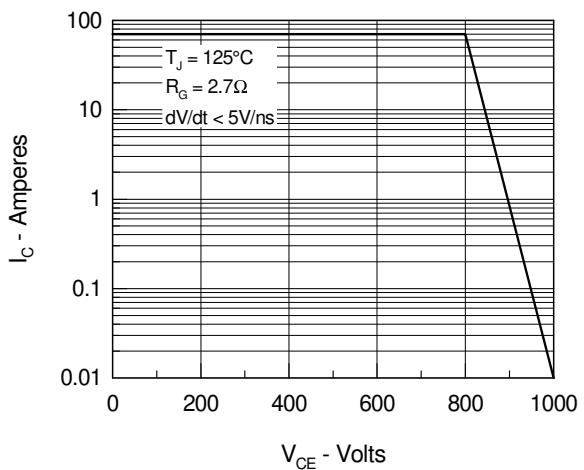


Fig.11 Transient Thermal Impedance

