


HiPerFET™ Power MOSFETs Q-Class

IXFK 26N60Q
IXFX 26N60Q

V_{DSS} = 600 V
I_{D25} = 26 A
R_{DS(on)} = 0.25 Ω

t_{rr} ≤ 250 ns


N-Channel Enhancement Mode
Avalanche Rated, High dv/dt, Low Q_g




Preliminary Data

| Symbol | Test Conditions | Maximum Ratings | |
|------------------|---|-----------------|-----------------|
| V _{DSS} | T _J = 25°C to 150°C | 600 | V |
| V _{DGR} | T _J = 25°C to 150°C; R _{GS} = 1 MΩ | 600 | V |
| V _{GS} | Continuous | ±20 | V |
| V _{GSM} | Transient | ±30 | V |
| I _{D25} | T _C = 25°C | 26 | A |
| I _{DM} | T _C = 25°C, pulse width limited by T _{JM} | 104 | A |
| I _{AR} | T _C = 25°C | 26 | A |
| E _{AR} | T _C = 25°C | 45 | mJ |
| E _{AS} | T _C = 25°C | 1.5 | J |
| dv/dt | I _S ≤ I _{DM} , di/dt ≤ 100 A/μs, V _{DD} ≤ V _{DSS} , T _J ≤ 150°C, R _G = 2 Ω | 5 | V/ns |
| P _D | T _C = 25°C | 360 | W |
| T _J | | -55 ... +150 | °C |
| T _{JM} | | 150 | °C |
| T _{stg} | | -55 ... +150 | °C |
| T _L | 1.6 mm (0.063 in) from case for 10 s | 300 | °C |
| M _d | Mounting torque | TO-264 | 0.9/6 Nm/lb.in. |
| Weight | | PLUS-247 | 6 g |
| | | TO-264 | 10 g |

PLUS247™ (IXFX)

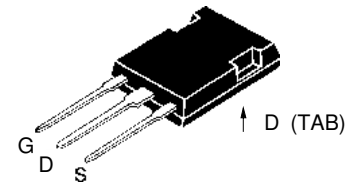

TO-264 AA (IXFK)



G = Gate
S = Source

D = Drain
TAB = Drain

Features

- Low gate charge
- International standard packages
- Epoxy meet UL 94 V-0, flammability classification
- Low R_{DS(on)} HDMOS™ process
- Rugged polysilicon gate cell structure
- Avalanche energy and current rated
- Fast intrinsic Rectifier

Advantages

- Easy to mount
- Space savings
- High power density

| Symbol | Test Conditions | Characteristic Values (T _J = 25°C, unless otherwise specified) | | |
|---------------------|---|--|------|---------------|
| | | min. | typ. | max. |
| V _{DSS} | V _{GS} = 0 V, I _D = 250 μA | 600 | | V |
| V _{GS(th)} | V _{DS} = V _{GS} , I _D = 4 mA | 2.5 | | 4.5 V |
| I _{GSS} | V _{GS} = ±20 V _{DC} , V _{DS} = 0 | | | ±200 nA |
| I _{DSS} | V _{DS} = V _{DSS} , V _{GS} = 0 V | | | 25 μA 1 mA |
| R _{DS(on)} | V _{GS} = 10 V, I _D = 0.5 • I _{D25} Pulse test, t ≤ 300 μs, duty cycle d ≤ 2 % | | | 0.25 Ω |


| Symbol | Test Conditions | Characteristic Values ($T_J = 25^\circ\text{C}$, unless otherwise specified) | | | |
|--------------|--|---|------|------|-----|
| | | min. | typ. | max. | |
| g_{fs} | $V_{DS} = 10\text{ V}$; $I_D = 0.5 \cdot I_{D25}$, pulse test | 14 | 22 | S | |
| C_{iss} | $V_{GS} = 0\text{ V}$, $V_{DS} = 25\text{ V}$, $f = 1\text{ MHz}$ | | 5100 | pF | |
| C_{oss} | | | 560 | pF | |
| C_{rss} | | | 210 | pF | |
| $t_{d(on)}$ | $V_{GS} = 10\text{ V}$, $V_{DS} = 0.5 \cdot V_{DSS}$, $I_D = 0.5 \cdot I_{D25}$ $R_G = 2.0\ \Omega$ (External), | | 30 | ns | |
| t_r | | | 32 | ns | |
| $t_{d(off)}$ | | | 80 | ns | |
| t_f | | | 16 | ns | |
| $Q_{g(on)}$ | $V_{GS} = 10\text{ V}$, $V_{DS} = 0.5 \cdot V_{DSS}$, $I_D = 0.5 \cdot I_{D25}$ | | 150 | 200 | nC |
| Q_{gs} | | | 34 | nC | |
| Q_{gd} | | | 80 | nC | |
| R_{thJC} | TO-264 | | | 0.35 | K/W |
| R_{thCK} | | | 0.15 | K/W | |

Source-Drain Diode

Characteristic Values
($T_J = 25^\circ\text{C}$, unless otherwise specified)

| Symbol | Test Conditions | min. | typ. | max. | |
|----------|--|------|------|------|---------------|
| I_S | $V_{GS} = 0\text{ V}$ | | | 26 | A |
| I_{SM} | Repetitive; pulse width limited by T_{JM} | | | 104 | A |
| V_{SD} | $I_F = I_S$, $V_{GS} = 0\text{ V}$, Pulse test, $t \leq 300\ \mu\text{s}$, duty cycle $d \leq 2\%$ | | | 1.5 | V |
| t_{rr} | $I_F = I_S$, $-di/dt = 100\text{ A}/\mu\text{s}$, $V_R = 100\text{ V}$ | | 1 | 250 | ns |
| Q_{RM} | | | 10 | | μC |
| I_{RM} | | | | | A |


PLUS 247™ Outline



Terminals: 1 - Gate
2 - Drain (Collector)
3 - Source (Emitter)
4 - Drain (Collector)

| Dim. | Millimeter | | Inches | |
|----------------|------------|-------|----------|-------|
| | Min. | Max. | Min. | Max. |
| A | 4.83 | 5.21 | .190 | .205 |
| A ₁ | 2.29 | 2.54 | .090 | .100 |
| A ₂ | 1.91 | 2.16 | .075 | .085 |
| b | 1.14 | 1.40 | .045 | .055 |
| b ₁ | 1.91 | 2.13 | .075 | .084 |
| b ₂ | 2.92 | 3.12 | .115 | .123 |
| C | 0.61 | 0.80 | .024 | .031 |
| D | 20.80 | 21.34 | .819 | .840 |
| E | 15.75 | 16.13 | .620 | .635 |
| e | 5.45 BSC | | .215 BSC | |
| L | 19.81 | 20.32 | .780 | .800 |
| L1 | 3.81 | 4.32 | .150 | .170 |
| Q | 5.59 | 6.20 | .220 | 0.244 |
| R | 4.32 | 4.83 | .170 | .190 |

TO-264 AA Outline



| Dim. | Millimeter | | Inches | |
|------|------------|-------|----------|-------|
| | Min. | Max. | Min. | Max. |
| A | 4.82 | 5.13 | .190 | .202 |
| A1 | 2.54 | 2.89 | .100 | .114 |
| A2 | 2.00 | 2.10 | .079 | .083 |
| b | 1.12 | 1.42 | .044 | .056 |
| b1 | 2.39 | 2.69 | .094 | .106 |
| b2 | 2.90 | 3.09 | .114 | .122 |
| c | 0.53 | 0.83 | .021 | .033 |
| D | 25.91 | 26.16 | 1.020 | 1.030 |
| E | 19.81 | 19.96 | .780 | .786 |
| e | 5.46 BSC | | .215 BSC | |
| J | 0.00 | 0.25 | .000 | .010 |
| K | 0.00 | 0.25 | .000 | .010 |
| L | 20.32 | 20.83 | .800 | .820 |
| L1 | 2.29 | 2.59 | .090 | .102 |
| P | 3.17 | 3.66 | .125 | .144 |
| Q | 6.07 | 6.27 | .239 | .247 |
| Q1 | 8.38 | 8.69 | .330 | .342 |
| R | 3.81 | 4.32 | .150 | .170 |
| R1 | 1.78 | 2.29 | .070 | .090 |
| S | 6.04 | 6.30 | .238 | .248 |
| T | 1.57 | 1.83 | .062 | .072 |

IXYS reserves the right to change limits, test conditions, and dimensions.



Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.