

# FDBL0630N150

## MOSFET – N-Channel, POWERTRENCH<sup>®</sup>

**150 V, 169 A, 6.3 mΩ**

### Features

- Typ  $r_{DS(on)} = 5 \text{ m}\Omega$  at  $V_{GS} = 10 \text{ V}$ ,  $I_D = 80 \text{ A}$
- Typ  $Q_{g(tot)} = 70 \text{ nC}$  at  $V_{GS} = 10 \text{ V}$ ,  $I_D = 80 \text{ A}$
- UIS Capability
- This Device is Pb-Free and is RoHS Compliant

### Applications

- Industrial Motor Drive
- Industrial Power Supply
- Industrial Automation
- Battery Operated tools
- Battery Protection
- Solar Inverters
- UPS and Energy Inverters
- Energy Storage
- Load Switch

### MAXIMUM RATINGS ( $T_J = 25^\circ\text{C}$ , unless otherwise specified)

| Symbol          | Parameter  | Ratings         | Unit                      |
|-----------------|--|-----------------|---------------------------|
| $V_{DSS}$       | Drain to Source Voltage  | 150             | V                         |
| $V_{GS}$        | Gate to Source Voltage   | $\pm 20$        | V                         |
| $I_D$           | Drain Current – Continuous ( $V_{GS} = 10 \text{ V}$ )<br>(Note 1)<br>$T_C = 25^\circ\text{C}$ | 169             | A                         |
|                 | Pulsed Drain Current<br>$T_C = 25^\circ\text{C}$   | See Figure 4    |                           |
| EAS             | Single Pulse Avalanche Energy (Note 2)   | 502             | mJ                        |
| $P_D$           | Power Dissipation  | 500             | W                         |
|                 | Derate above $25^\circ\text{C}$  | 3.3             | $\text{W}/^\circ\text{C}$ |
| $T_J, T_{STG}$  | Operating and Storage Temperature  | $-55$ to $+175$ | $^\circ\text{C}$          |
| $R_{\theta JC}$ | Thermal Resistance Junction to Case  | 0.3             | $^\circ\text{C}/\text{W}$ |
| $R_{\theta JA}$ | Maximum Thermal Resistance Junction to Ambient (Note 3)  | 43              | $^\circ\text{C}/\text{W}$ |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.


1. Current is limited by junction temperature.
2. Starting  $T_J = 25^\circ\text{C}$ ,  $L = 0.24 \text{ mH}$ ,  $I_{AS} = 64 \text{ A}$ ,  $V_{DD} = 100 \text{ V}$  during inductor charging and  $V_{DD} = 0 \text{ V}$  during time in avalanche.
3.  $R_{\theta JA}$  is the sum of the junction-to-case and case-to-ambient thermal resistance where the case thermal reference is defined as the solder mounting surface of the drain pins.  $R_{\theta JC}$  is guaranteed by design while  $R_{\theta JA}$  is determined by the user's board design. The maximum rating presented here is based on mounting on a 1 in<sup>2</sup> pad of 2 oz copper.




**ON Semiconductor<sup>®</sup>**

[www.onsemi.com](http://www.onsemi.com)

| $V_{DSS}$ | $r_{DS(ON)} \text{ MAX}$ | $I_D \text{ MAX}$ |
|-----------|--------------------------|-------------------|
| 150 V     | 6.3 mΩ @ 10 V            | 169 A             |



MOSFET – N-Channel

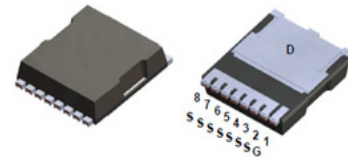

H-PSOF8L 11.68x9.80  
CASE 100CU

### MARKING DIAGRAM



$\$Y$  = ON Semiconductor Logo  
 $\&Z$  = Assembly Plant Code  
 $\&3$  = Date Code  
 $\&K$  = Lot Run Traceability Code  
 FDBL0630N150 = Specific Device Code

### ORDERING INFORMATION

See detailed ordering and shipping information on page 6 of this data sheet.

# FDBL0630N150

## ELECTRICAL CHARACTERISTICS (T<sub>J</sub> = 25°C unless otherwise noted)

| Symbol | Parameter | Test Condition | Min | Typ | Max | Unit |
|--------|-----------|----------------|-----|-----|-----|------|
|--------|-----------|----------------|-----|-----|-----|------|

### OFF CHARACTERISTICS

|                  |                                   |  |                                 |   |      |    |    |
|------------------|-----------------------------------|--|---------------------------------|---|------|----|----|
| B <sub>VDS</sub> | Drain to Source Breakdown Voltage | I <sub>D</sub> = 250 μA, V <sub>GS</sub> = 0 V | 150                             | – | –    | V  |    |
| I <sub>DSS</sub> | Drain to Source Leakage Current   | V <sub>DS</sub> = 150 V, V <sub>GS</sub> = 0 V | T <sub>J</sub> = 25°C           | – | –    | 1  | μA |
|                  |                                   |  | T <sub>J</sub> = 175°C (Note 4) | – | –    | 1  | mA |
| I <sub>GSS</sub> | Gate to Source Leakage Current    | V <sub>GS</sub> = ±20 V                        | –                               | – | ±100 | nA |    |

### ON CHARACTERISTICS

|                     |                                  |   |                                 |     |     |      |    |
|---------------------|----------------------------------|---|---------------------------------|-----|-----|------|----|
| V <sub>GS(th)</sub> | Gate to Source Threshold Voltage | V <sub>GS</sub> = V <sub>DS</sub> , I <sub>D</sub> = 250 μA | 2.0                             | 2.8 | 4.0 | V    |    |
| r <sub>DS(on)</sub> | Drain to Source On Resistance    | I <sub>D</sub> = 80 A, V <sub>GS</sub> = 10 V               | T <sub>J</sub> = 25°C           | –   | 5   | 6.3  | mΩ |
|                     |                                  |   | T <sub>J</sub> = 175°C (Note 4) | –   | 14  | 17.5 | mΩ |

### DYNAMIC CHARACTERISTICS

|                     |                               |  |   |      |    |    |
|---------------------|-------------------------------|--|---|------|----|----|
| C <sub>iss</sub>    | Input Capacitance             | V <sub>DS</sub> = 75 V, V <sub>GS</sub> = 0 V, f = 1 MHz                   | – | 5805 | –  | pF |
| C <sub>oss</sub>    | Output Capacitance            |  | – | 536  | –  | pF |
| C <sub>rss</sub>    | Reverse Transfer Capacitance  |  | – | 16   | –  | pF |
| R <sub>g</sub>      | Gate Resistance               | f = 1 MHz  | – | 2.2  | –  | Ω  |
| Q <sub>g(ToT)</sub> | Total Gate Charge at 10 V     | V <sub>GS</sub> = 0 to 10 V, V <sub>DD</sub> = 75 V, I <sub>D</sub> = 80 A | – | 70   | 90 | nC |
| Q <sub>g(th)</sub>  | Threshold Gate Charge         | V <sub>GS</sub> = 0 to 2 V, V <sub>DD</sub> = 75 V, I <sub>D</sub> = 80 A  | – | 10.5 | 13 | nC |
| Q <sub>gs</sub>     | Gate to Source Gate Charge    | V <sub>DD</sub> = 75 V, I <sub>D</sub> = 80 A                              | – | 32.5 | –  | nC |
| Q <sub>gd</sub>     | Gate to Drain "Miller" Charge | V <sub>DD</sub> = 75 V, I <sub>D</sub> = 80 A                              | – | 10   | –  | nC |

### SWITCHING CHARACTERISTICS

|                     |                     |   |   |    |     |    |
|---------------------|---------------------|---|---|----|-----|----|
| t <sub>on</sub>     | Turn-On Time        | V <sub>DD</sub> = 75 V, I <sub>D</sub> = 80 A, V <sub>GS</sub> = 10 V, R <sub>GEN</sub> = 6 Ω | – | –  | 80  | ns |
| t <sub>d(on)</sub>  | Turn-On Delay Time  |   | – | 39 | –   | ns |
| t <sub>r</sub>      | Rise Time           |   | – | 30 | –   | ns |
| t <sub>d(off)</sub> | Turn-Off Delay Time |   | – | 70 | –   | ns |
| t <sub>f</sub>      | Fall Time           |   | – | 23 | –   | ns |
| t <sub>off</sub>    | Turn-Off Time       |   | – | –  | 130 | ns |

### DRAIN-SOURCE DIODE CHARACTERISTICS

|                 |                               |   |   |     |      |    |
|-----------------|-------------------------------|---|---|-----|------|----|
| V <sub>SD</sub> | Source to Drain Diode Voltage | I <sub>SD</sub> = 80 A, V <sub>GS</sub> = 0 V                                   | – | –   | 1.25 | V  |
|                 |                               | I <sub>SD</sub> = 40 A, V <sub>GS</sub> = 0 V                                   | – | –   | 1.2  | V  |
| T <sub>rr</sub> | Reverse Recovery Time         | I <sub>F</sub> = 80 A, dI <sub>SD</sub> /dt = 100 A/μs, V <sub>DD</sub> = 120 V | – | 108 | 125  | ns |
| Q <sub>rr</sub> | Reverse Recovery Charge       |   | – | 323 | 467  | nC |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

4. The maximum value is specified by design at T<sub>J</sub> = 175°C. Product is not tested to this condition in production.

TYPICAL CHARACTERISTICS

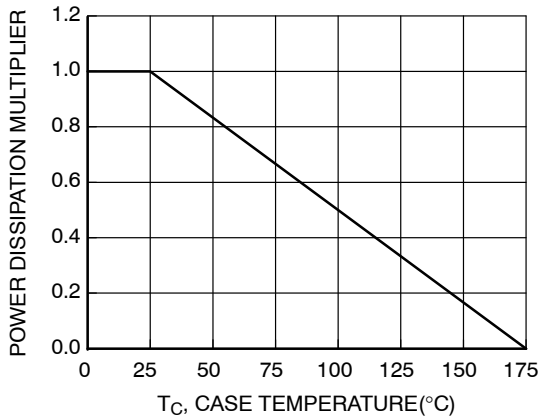


Figure 1. Normalized Power Dissipation vs. Case Temperature

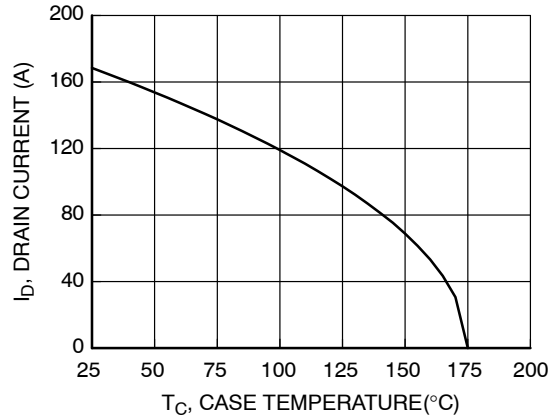


Figure 2. Maximum Continuous Drain Current vs. Case Temperature

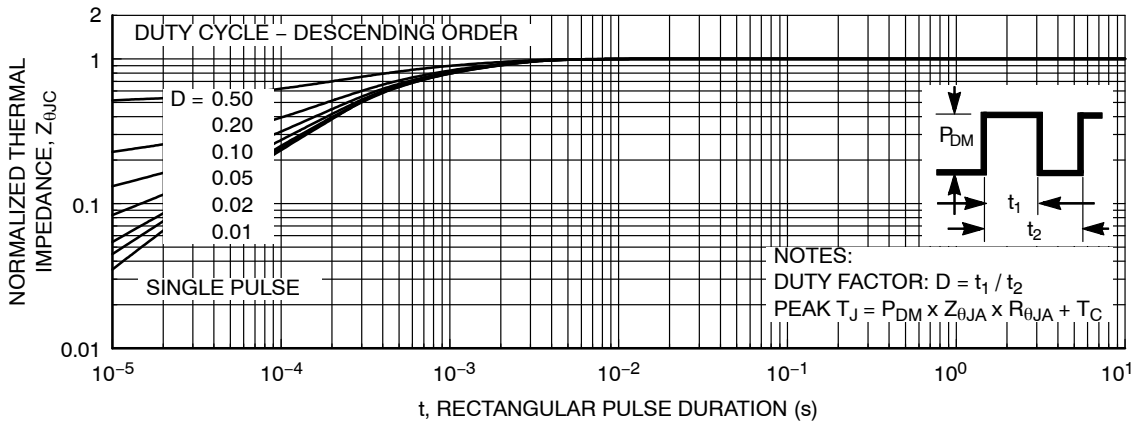


Figure 3. Normalized Maximum Transient Thermal Impedance

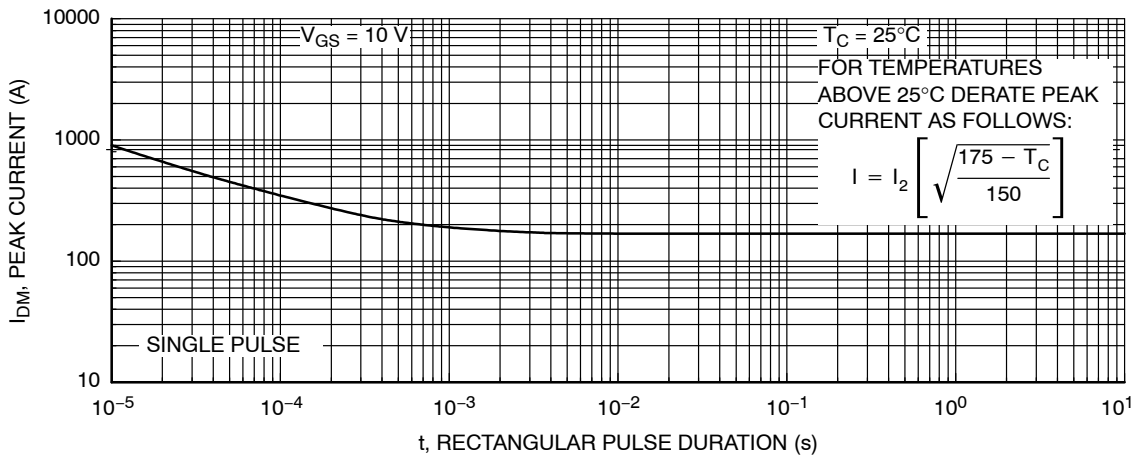


Figure 4. Peak Current Capability

TYPICAL CHARACTERISTICS (continued)

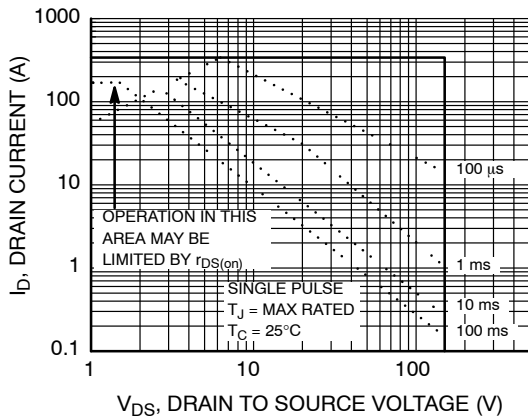


Figure 5. Forward Bias Safe Operating Area

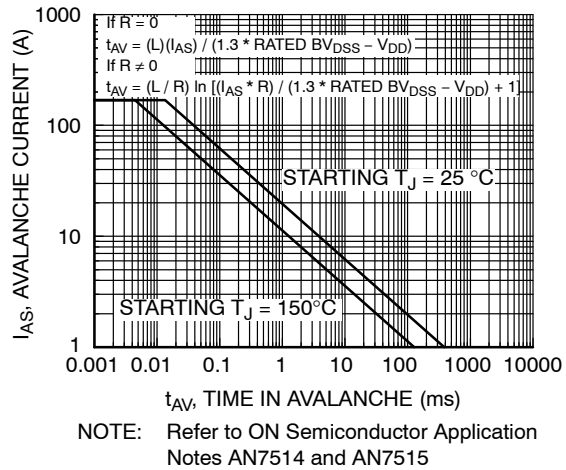


Figure 6. Unclamped Inductive Switching Capability

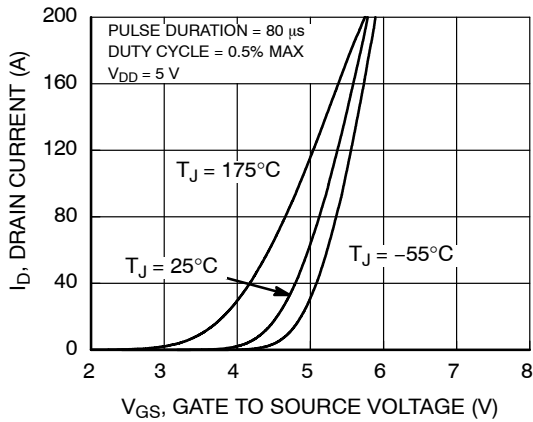


Figure 7. Transfer Characteristics

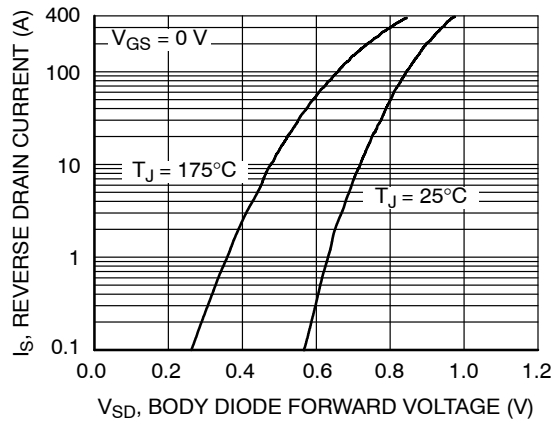


Figure 8. Forward Diode Characteristics

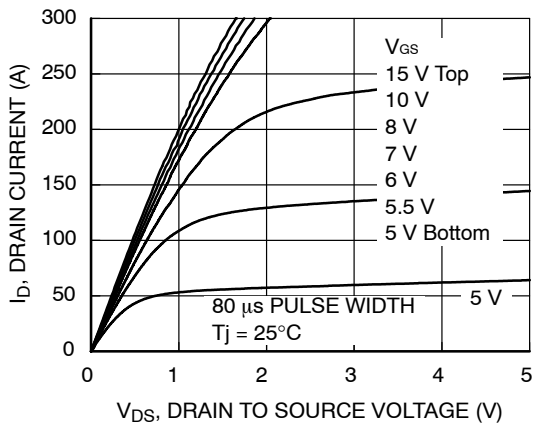


Figure 9. Saturation Characteristics

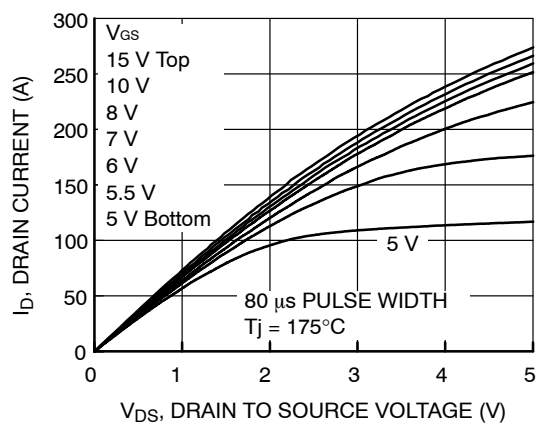


Figure 10. Saturation Characteristics

TYPICAL CHARACTERISTICS (continued)

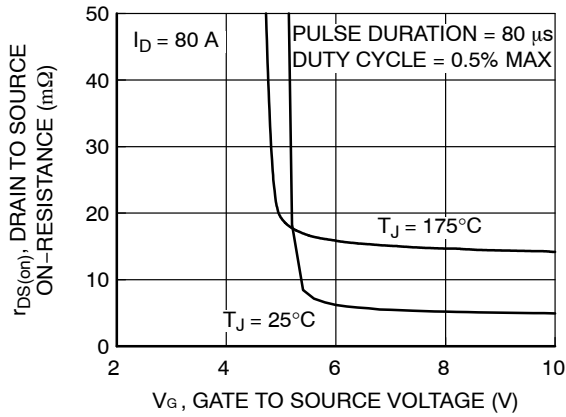


Figure 11. Rdson vs. Gate Voltage

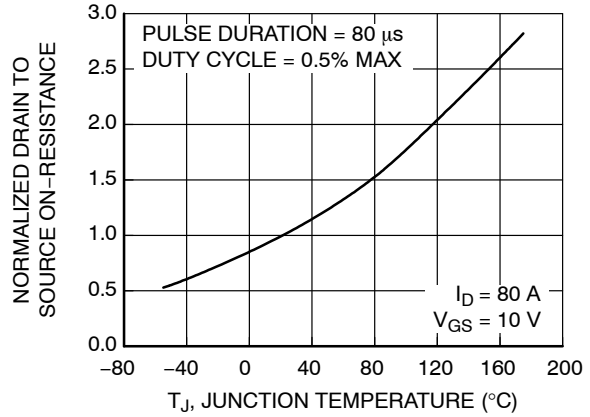


Figure 12. Normalized Rdson vs. Junction Temperature

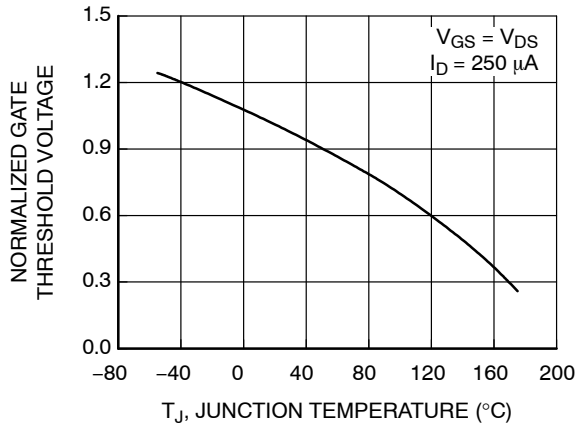


Figure 13. Normalized Gate Threshold Voltage vs. Temperature

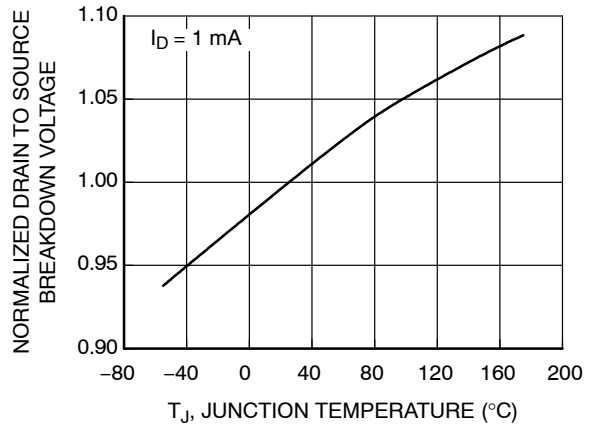


Figure 14. Normalized Drain to Source Breakdown Voltage vs. Junction Temperature

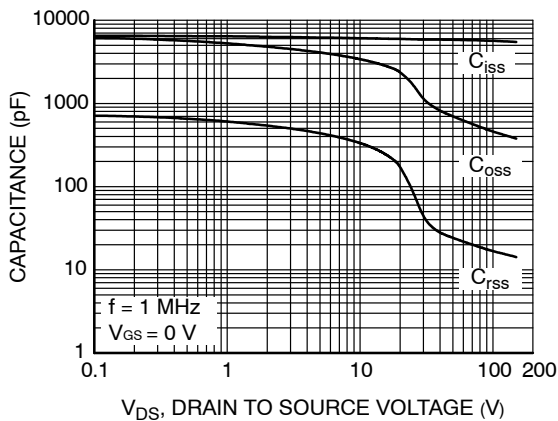


Figure 15. Capacitance vs Drain to Source Voltage

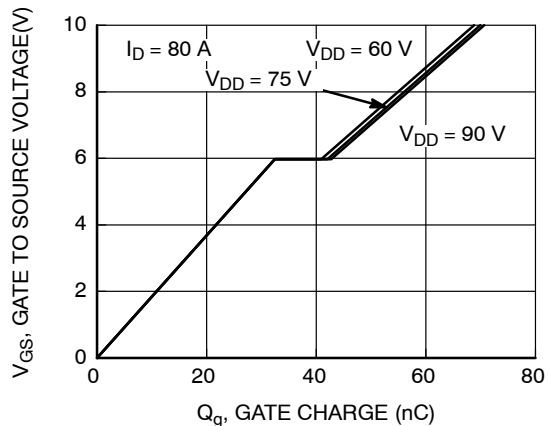


Figure 16. Gate Charge vs Gate to Source Voltage

# FDBL0630N150

## ORDERING INFORMATION


| Device       | Device Marking | Package                          | Shipping <sup>†</sup> |
|--------------|----------------|----------------------------------|-----------------------|
| FDBL0630N150 | FDBL0630N150   | H-PSOF8L 11.68x9.80<br>(Pb-Free) | 2000 / Tape & Reel    |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

POWERTRENCH is registered trademark of Semiconductor Components Industries, LLC (SCILLC) or its subsidiaries in the United States and/or other countries.

**H-PSOF8L 11.68x9.80**  
**CASE 100CU**  
**ISSUE O**

DATE 30 NOV 2016

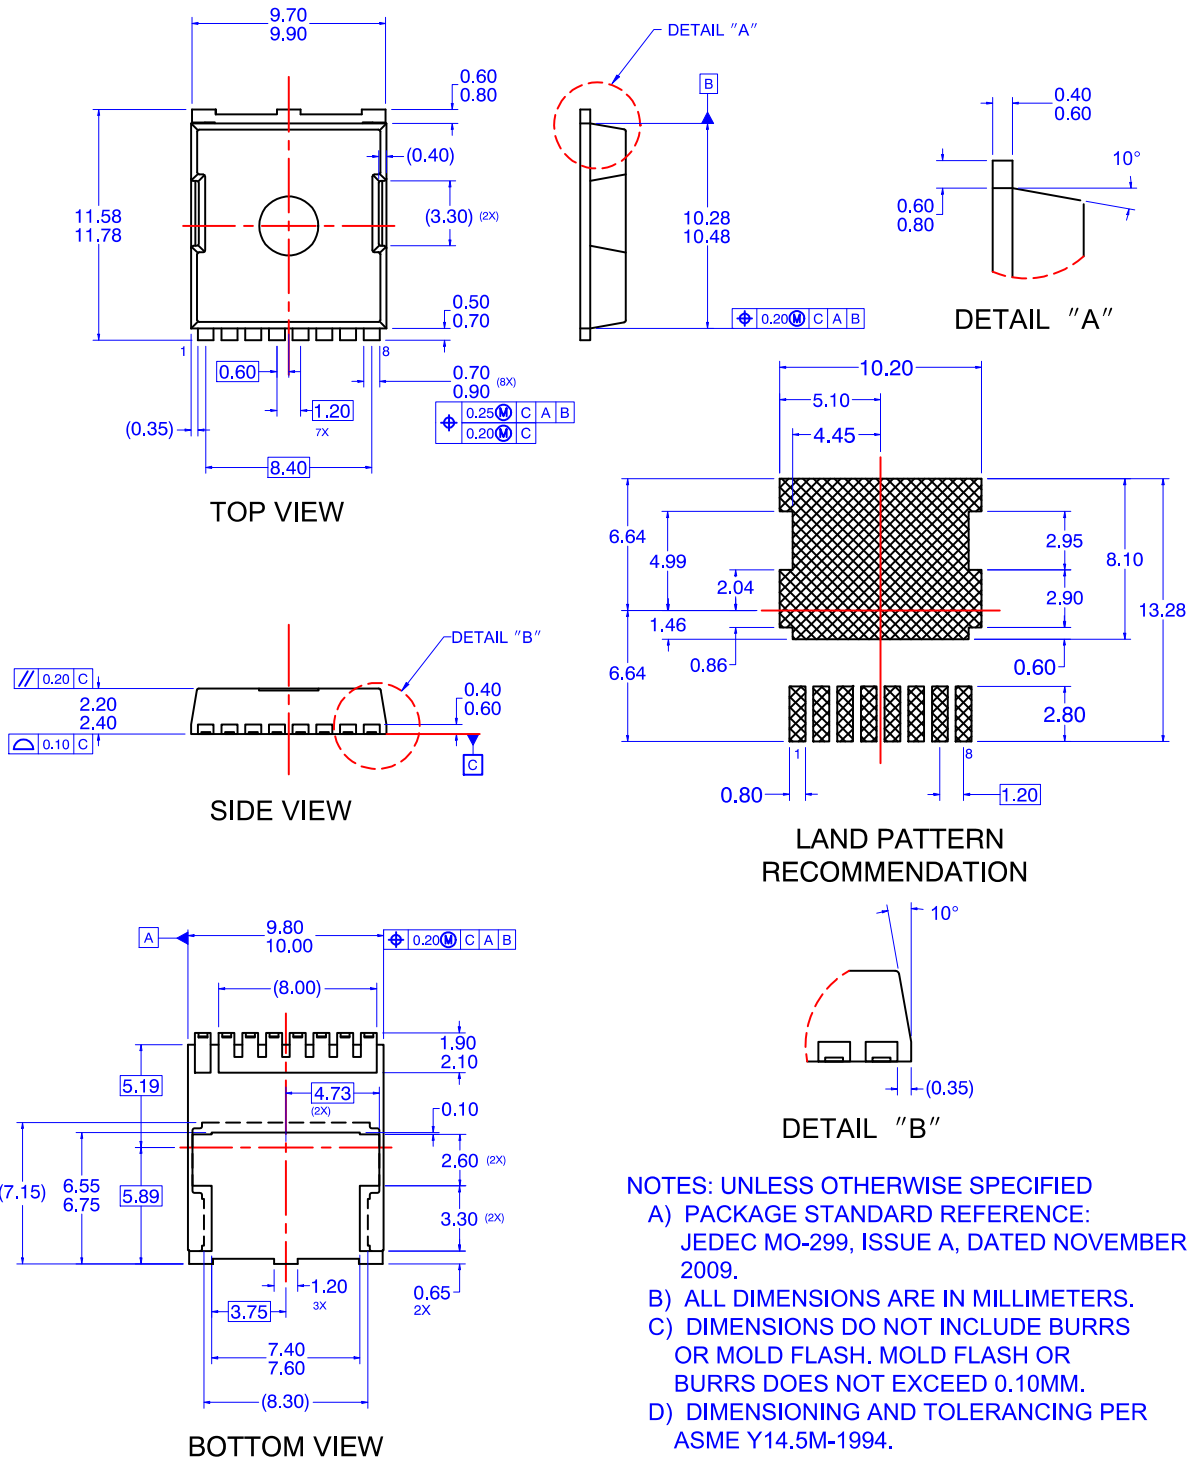

- NOTES: UNLESS OTHERWISE SPECIFIED**
- A) PACKAGE STANDARD REFERENCE: JEDEC MO-299, ISSUE A, DATED NOVEMBER 2009.
  - B) ALL DIMENSIONS ARE IN MILLIMETERS.
  - C) DIMENSIONS DO NOT INCLUDE BURRS OR MOLD FLASH. MOLD FLASH OR BURRS DOES NOT EXCEED 0.10MM.
  - D) DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994.

|                         |                                  |  |
|-------------------------|----------------------------------|--|
| <b>DOCUMENT NUMBER:</b> | <b>98AON13813G</b>               | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>STATUS:</b>          | <b>ON SEMICONDUCTOR STANDARD</b> |  |
| <b>NEW STANDARD:</b>    |                                  |  |
| <b>DESCRIPTION:</b>     | <b>H-PSOF8L 11.68x9.80</b>       | <b>PAGE 1 OF 2</b>   |





ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)

**Order Literature:** <http://www.onsemi.com/orderlit>

For additional information, please contact your local  
Sales Representative